



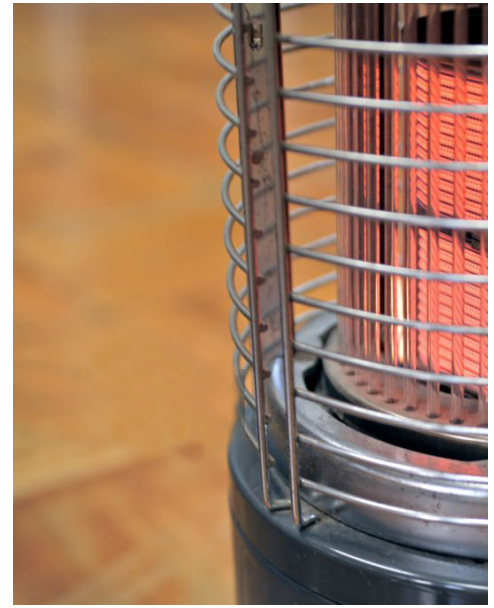
CARBON MONOXIDE ALARM

BATTERY POWERED

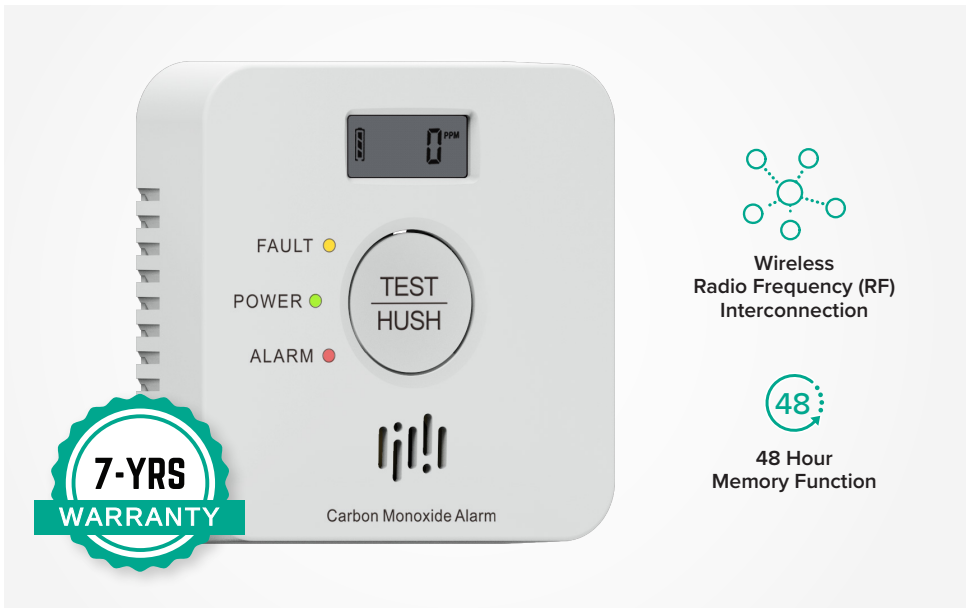


**Wireless
Radio Frequency (RF)
Interconnection**


**48 Hour
Memory Function**



CARBON MONOXIDE ALARM WITH BUILT-IN RF MODULE

Emerald's Carbon Monoxide Alarm features a built-in RF module for easy integration with other Emerald RF alarms in the home, enhancing overall safety. With a 48-hour memory function, it simplifies the identification of faulty alarms, increasing protection against carbon monoxide hazards.

This apparatus is designed to protect individuals from the acute effects of carbon monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt consult a medical practitioner.

The battery in this unit is intended to last it's 7 year service life and cannot be replaced.

INCREASE YOUR PROTECTION

Receive alerts from your Emerald radio frequency (RF) smoke alarm network anytime, anywhere with SafeLink via your phone and the Emerald app.

FEATURES

- Built-in RF module
- 48 hour memory function
- Ceiling or wall mount
- Fault and low battery warning
- Easy install
- Hush function
- Complies with EN50291-1:2018



SPECIFICATIONS

MODEL NUMBER	EP-CO-RF-07
DIMENSIONS	93 x 93 x 27.1mm
WEIGHT	109.2g
WARRANTY	7 Years
WIRELESS DISTANCE	>20m (100m outside)

POWER - BATTERY	7 year non-replaceable 3V lithium battery
MOUNTING OPTIONS	Ceiling or wall mount
INTERCONNECT	Built-in wireless radio frequency (RF) technology Connects with up to 40 Emerald RF enabled alarms
SENSOR	Electrochemical technology
SOUND PATTERN	ISO 8201
ALARM VOLUME	>85dB(A) @ 3m
NORMAL OPERATING & STORAGE TEMPERATURE	-10°C to 40°C
NORMAL OPERATING & STORAGE HUMIDITY	15% to 93% relative humidity (non-condensing)
COMPATIBILITY	RF carbon monoxide alarm is compatible with - • Emerald's radio frequency (RF) enabled alarms • Emerald SafeLink Wi-Fi gateway • Smoke Alarm Controller

